

# Table of Contents

<b>Edit Table Plugin.....</b>	<b>1</b>
Per Table Settings.....	1
Using Macros in the Format Parameter.....	2
Date Field Type.....	2
Per Cell Settings.....	3
Table Buttons.....	3
Examples.....	3
Plugin Settings.....	4
Limitations and Known Issues.....	5
Installation Instructions.....	5
License.....	5
Plugin Info.....	6

# Edit Table Plugin

Edit tables using edit fields, date pickers and drop down boxes

Simply add an [ Edit table ] button to an existing table by writing %EDITTABLE{ }% directly above the table. This can be added to tables that are formatted with TablePlugin: add the EDITTABLE macro just above or below the TABLE tag. It can also be used without any TABLE tag.

Customize entry fields by specifying the format: use a text field, a drop down box, a date field, radio buttons or checkboxes.

Multiple tables per topic are editable, but only one at a time can be edited.

## Per Table Settings

Add a %EDITTABLE{ . . . }% macro just before an existing table to make it editable, or add the variable anywhere in a topic to start a new table.

- Supported attributes:

Attribute	Comment
header	Specify the header format of a new table like "   *Food*   *Drink*   ". Useful to start a table with only a button
format	<p>The format of one column when editing the table. A cell can be a text input field, or any of these edit field types:</p> <ul style="list-style-type: none"><li>• Text input field (1 line):   text, &lt;size&gt;, &lt;initial value&gt;  </li><li>• Textarea input field:   textarea, &lt;rows&gt;x&lt;columns&gt;, &lt;initial value&gt;  </li><li>• Drop down box:   select, &lt;size&gt;, &lt;option 1&gt;, &lt;option 2&gt;, etc*   * only one item can be selected</li><li>• Radio buttons:   radio, &lt;size*&gt;, &lt;option 1&gt;, &lt;option 2&gt;, etc   * size indicates the number of buttons per line in edit mode</li><li>• Checkboxes:   checkbox, &lt;size*&gt;, &lt;option 1&gt;, &lt;option 2&gt;, etc   * size indicates the number of checkboxes per line in edit mode</li><li>• Fixed label:   label, 0, &lt;label text&gt;  </li><li>• Row number:   row, &lt;offset&gt;  </li><li>• Date:   date, &lt;size&gt;, &lt;initial value&gt;, &lt;DHTML date format&gt;   (see Date Field Type)</li></ul>
changerows	

Attribute	Comment
	Rows can be added and removed if "on" Rows can be added but not removed if "add" Rows cannot be added or removed if "off"
quietsave	Quiet Save button is shown if "on", hidden if "off"
include	Other topic defining the EDITTABLE parameters. The first %EDITTABLE% in the topic is used. This is useful if you have many topics with the same table format and you want to update the format in one place. Use topic or web.topic notation.
helptopic	Topic name containing help text shown below the table when editing a table. The %STARTINCLUDE% and %STOPINCLUDE% macros can be used in the topic to specify what is shown.
headerislabel	Table header cells are read-only (labels) if "on"; header cells can be edited if "off" or "0"
editbutton	Set edit button text, e.g. "Edit this table"; set button image with alt text, e.g. "Edit table, %PUBURL%/%SYSTEMWEB%/DocumentGraphics/edittopic.gif"; hide edit button at the end of the table with "hide" (Note: Button is automatically hidden if an edit button is present in a cell)
buttonrow	Set to top to put the edit buttons above the table.
javascriptinterface	Use javascript to directly move and delete row without page refresh. Enable with "on", disable with "off".

## Using Macros in the Format Parameter


By default, macros in <initial value> (of text input field) and <label text> (of fixed label) get expanded when a new row is added. This can be used for example to add a timestamp to a label. You can escape characters with format tokens if you do not want that.

Any macro inside a table cell will be preserved. For instance, %TOPIC% will not get expanded to the current topic name.

The format tokens are the same as with FormattedSearch:

Escape:	Expands To:
\$n or \$n()	New line. Use \$n() if followed by alphanumeric character, e.g. write Foo\$n() Bar instead of Foo\$nBar
\$nop or \$nop()	Is a "no operation".
\$quot	Double quote ("")
\$percnt	Percent sign (%)
\$dollar	Dollar sign (\$)

## Date Field Type

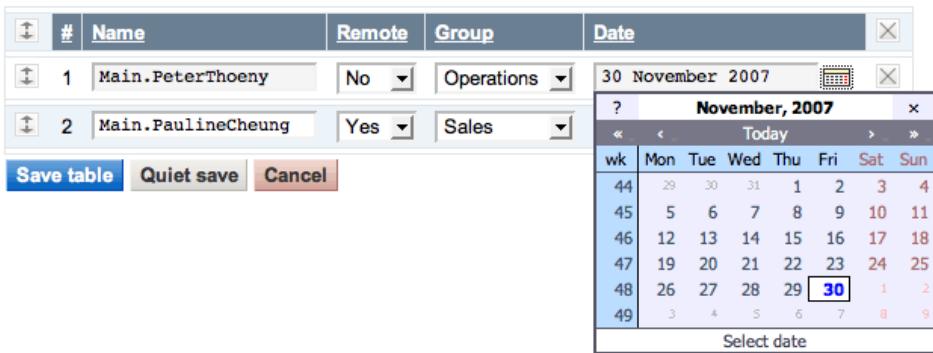

The `date` field type allows one to choose a date with a popup calendar. Popup calendar works with all modern browsers. The date picker button is inactive if the browser cannot support the popup calendar or if javascript is disabled.

## Per Cell Settings

An individual edit field type can be defined for each table cell. Place an `%EDITCELL{ "type, ..."}%` macro at the end of the cell content. This is useful to override the per column `%EDITTABLE{ format="..." }%` settings, or to create tables with key/value rows. All edit field types of the `format="..."` parameter are supported. For example, to define a text field, type: | cell content `%EDITCELL{ "text, 20" }% |`

It is also possible to place the edit button inside a cell instead of default location below the table. Type | `%EDITCELL{ "editbutton, 1, Edit this table" }% |` to show a button, or | `%EDITCELL{ "editbutton, 1, Edit table, Image-URL" }% |` to show a button image with alternate text.

**Note:** The `%EDITCELL{ ... }%` macro cannot be used by itself; place an `%EDITTABLE{ ... }% =variable` at the beginning of a table where you want to use `=%EDITCELL{ ... }%` variables.

## Table Buttons

- In page view mode:
  - ◆ - turn the table into edit mode
- In edit mode:
  - ◆ - save your changes
  - ◆ - save your changes without alerting subscribed WebNotify users
  - ◆ - add row to the table (if enabled)
  - ◆ - remove last row from the table (if enabled)
  - ◆ - cancel without saving and release edit lock
  - ◆ - Move a row by clicking this button next to the row to be moved, then at a destination.
  - ◆ - Deletes the row next to this button.

## Examples

```
Line before table: %EDITTABLE{ format="| row, -1 | text, 20, init | select, 1,
one, two, three, four | radio, 3,:-),:-I,:-( | label, 0,
%SERVERTIME{"$day $mon $year $hour:$min"}% |" changerows="on" }%
```

Nr	Text field	Drop down	Mood	Timestamp
----	------------	-----------	------	-----------

Nr	Text field	Drop down	Mood	Timestamp
1	hello table	one		26 Jun 2002 12:30
2		two		27 Jun 2002 12:40

**Note:** Please do not save this example table! Use Foswiki:Sandbox.EditTablePluginTesting if you want to try out this Plugin

If this plugin is installed you will see an [ Edit table ] button above; if you were to click on it you get this form:

Nr	Text field	Drop down	Mood	Timestamp
1				26 Jun 2002 12:30
2				

27 Jun 2002 12:40

The following example shows a simple table with key/value rows. The default edit field type for the value column is a text field. This is overloaded by a selector for the Gender, and a date picker for the DOB. This is typically used by Foswiki applications where new topics with tables are created based on a template topic.

You type:	You get:										
<pre>%TABLE{ "headerrows="1" }% %EDITTABLE{ format="  1abel   text, 40  " changerows="off" }%   *Key*   *Value*   Name:   John Smith     Gender:   M %EDITCELL{select, 1, , F, M}%     DOB:   1999/12/31 %EDITCELL{date, 10}%     City:   New York  </pre>	<table border="1" style="border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Key</th> <th style="text-align: left; padding-bottom: 2px;">Value</th> </tr> </thead> <tbody> <tr> <td>Name:</td> <td>John Smith</td> </tr> <tr> <td>Gender:</td> <td>M</td> </tr> <tr> <td>DOB:</td> <td>1999/12/31</td> </tr> <tr> <td>City:</td> <td>New York</td> </tr> </tbody> </table> <input checked="" type="checkbox"/> Edit	Key	Value	Name:	John Smith	Gender:	M	DOB:	1999/12/31	City:	New York
Key	Value										
Name:	John Smith										
Gender:	M										
DOB:	1999/12/31										
City:	New York										

## Plugin Settings

You can override the default settings for the plugin by defining the following preferences. Note: Texts inside `%MAKETEXT{ }%` are translated into other languages.

Preference	Meaning	Default
EDITTABLEPLUGIN_JAVASCRIPTINTERFACE	Set to 0 to be disable the ability to directly move and delete row without page refresh. Can be overridden with parameter javascriptinterface	1
EDITTABLEPLUGIN_CHANGEROWS	Default for change rows flag: on, off, add	on
EDITTABLEPLUGIN QUIETS救人	Default flag for quiet save option: on to show the Quiet Save button, off to hide	on
EDITTABLEPLUGIN_EDIT_BUTTON	Specify button text, or alternate text, image URL.	Edit this table, <input checked="" type="checkbox"/> Edit
EDITTABLEPLUGIN_SAVE_BUTTON		

Preference	Meaning	Default
	Specify button text, or alternate text, image URL.	Save table
EDITABLEPLUGIN QUIET_SAVE_BUTTON	Specify button text, or alternate text, image URL.	Quiet save
EDITABLEPLUGIN_ADD_ROW_BUTTON	Specify button text, or alternate text, image URL.	Add row
EDITABLEPLUGIN_DELETE_LAST_ROW_BUTTON	Specify button text, or alternate text, image URL.	Delete last row
EDITABLEPLUGIN_CANCEL_BUTTON	Specify button text, or alternate text, image URL.	Cancel
EDITABLEPLUGIN_INCLUDED_TOPIC_DOES_NOT_EXIST	Default help texts	Warning: 'include' topic does not exist!

**Note:** The Plugin uses base settings like date format, language and style from the JSCalendarContrib.

## Limitations and Known Issues

- This Plugin does not support table formatting like Multi-span cells (e.g. | . . . | |) and cell justification (e.g. | centered | right |)
- There is a performance issue when editing a large table, say, with more than 50 rows
- You cannot put two %EDITABLE{}% statements on the same line in the source
- You can include %-vars now in select values, by quoting them with <nop>, as in %<nop>X% for %X%, say for instance:  

```
select,1,%<nop>X%,%<nop>Y%
```

## Installation Instructions

You do not need to install anything in the browser to use this extension. The following instructions are for the administrator who installs the extension on the server.

Open configure, and open the "Extensions" section. Use "Find More Extensions" to get a list of available extensions. Select "Install".

If you have any problems, or if the extension isn't available in configure, then you can still install manually from the command-line. See <http://foswiki.org/Support/ManuallyInstallingExtensions> for more help.

Test if the Plugin is correctly installed:

- Check above example if there is an [ **Edit table** ] button below the table in above example
- Click on [ **Edit table** ], make changes and save the table

## License

- The Edit Table Plugin is released under the GPL

# Plugin Info

Copyright:	© 2008-2009, Arthur Clemens and Foswiki Contributors; Copyright © 2002-2007 Peter Thoeny, peter@thoeny.org and TWiki Contributors
License:	GPL (GNU General Public License)
Version:	5854 (2009-12-23)
Release:	4.34
Change History:	
23 Dec 2009:	4.34: Arthur Clemens: Fixed a problem that the button "Delete last row" would remove newly added rows.
16 Sep 2009:	4.33: Kenneth Lavrsen: Removed debug alert when deleting rows
13 Sep 2009:	4.32: Arthur Clemens: Fix possible sorting issue on edit screen when no TABLE tag is present.
02 Sep 2009:	4.31: Kenneth Lavrsen: Disabled the display of SpreadSheetPlugin "CALC" in headers and footers as this caused the string CALC to be saved instead of the real formular.
14 Jun 2009:	4.30: Arthur Clemens: Major code refactoring to let EditTablePlugin work together with SpreadSheetPlugin.
18 Apr 2009:	4.22: Ignore all saving unless it happened by saving a form using POST method. Fixed including edit parameters from subwebs. Removed support for settings in the plugin topic which is a bad idea anyway as they get overwritten at each Foswiki upgrade. Define the global settings in Main.SitePreferences instead.
26 Mar 2009:	4.21: Fixed a problem with plugin going into deep recursive orbit when a table is followed by text containing vertical bars but not valid table row.
17 Mar 2009:	4.20: Fixed several bugs related to use of macros in EDITTABLE and TABLE tags
08 Feb 2009:	4.13: Fixed incidental removal of EDITCELL tags when a different table in the topic is edited. Improved display of linebreaks and TML inside cells.
07 Feb 2009:	4.12: Protect verbatim class="xxx" during edit.
16 Dec 2008:	4.11: Kenneth Lavrsen: Foswiki version
01 Nov 2008:	4.9: Arthur Clemens: Fixed rendering of verbatim blocks when editing. Added parameter buttonrow="top" to allow the buttons to be positioned at the top of the table.
26 Sep 2008:	4.8.7: Arthur Clemens: Let empty table initialize more than one column from header parameter
24 Sep 2008:	4.8.6: Arthur Clemens: Fix parsing of header labels
21 Sep 2008:	4.8.5: Arthur Clemens: Fix rendering of TML inside label
03 Aug 2008:	4.8.4: TWiki 4.2.1 release version
19 Jul 2008:	4.8.3: Bugfix release
20 Mar 2008:	4.8: Arthur Clemens: Code refactoring; disabled table sort when editing; removed usage of \$percnt to prevent variable expansion (is now done automatically); made Javascript interface aware of headers and footers, and of changerows="off"; improved feedback on row move.
25 Dec 2007:	4.7.1: Arthur Clemens: Added warning if include parameter topic does not exist.
22 Dec 2007:	4.7: Arthur Clemens: Changed handling of escaped variables. To escape TWiki variable, use formatting tokens such as \$percnt.
16 Dec 2007:	4.6: Kenneth Lavrsen: The plugin prevents TablePlugin from initSorting the table being edited. This is done by temporarily appending the attribute disableallsort="on" to the TABLE tag of a table being edited. Additionally all header sorting is disabled while editing a table by setting a hidden formfield sort to "off". Disabling sorting while editing is needed now that the EditTablePlugin supports moving rows up and down.
01 Dec 2007:	4.3: Arthur Clemens: added support for TablePlugin headerrows and footerrows; updated edit button

16 Oct 2007:	4.2: Arthur Clemens: refactoring, bug fixes.
07 Oct 2007:	15182: PTh: Added VarEDITABLE to have it listed in TWikiVariables
15 Mar 2007:	Arthur Clemens: Fixed eating of double newlines; icons for javascript buttons and interface improvements. By default the javascript interface is turned off, set JAVASCRIPTINTERFACE to use it in edit mode.
05 Mar 2007:	Byron Darrah: Added ability to dynamically move and delete rows.
12 Oct 2006:	Item2982 Use default date format from JSCalendarContrib
02 Oct 2006:	Item2884 Check also for access permission in meta data; proper fix to not warn if oneself has a lock on topic
30 Aug 2006:	Item2829 Remove whitespace from select, radio and checkbox items; restored topic lock if \$TWiki::Plugins::VERSION < 1.1
29 Jul 2006:	Item2684 - Quietly ignore topic edit locks on table edit
21 Jan 2006:	TWiki:Main.CrawfordCurrie ported to TWiki-4.0.0, changed to use JSCalendarContrib
16 Sep 2004:	Added radio buttons and checkbox controls; escaped " " pipe symbol found in input fields to preserve tables
01 Aug 2004:	Fixed bug where editable did not work if at the end of a topic
07 Apr 2004:	Fixed bug where two tables got updated when you edit and save a table included into a topic containing other edit tables
02 Mar 2004:	Default for %EDITCELL{editbutton}% is EDITBUTTON preference
27 Feb 2004:	Added QUIETSAVE setting and quietsave parameter; image for Edit button
18 Feb 2004:	Doc fixes; allow edit button anywhere in a cell not just at the end of a cell
17 Feb 2004:	Added per cell definition of edit field types with %EDITCELL{ }% variable; added headerislabel and editbutton parameters
20 Dec 2003:	Fixed bug where calendar did not work after adding a row (TWiki:Main/PaulineCheung); added all language files of Mishoo DHTML calendar 0.9.5
13 Dec 2003:	Added CHANGEROWS, JSCALENDARDATEFORMAT, JSCALENDARLANGUAGE, JSCALENDAROPTIONS settings
16 Oct 2003:	small typo fixed (garbled if ---+ header on top)
15 Oct 2003:	new date field type with javascript calendar - CN
14 Oct 2003:	docfix: the documentation page was an old one - CN
13 Oct 2003:	bugfix: %-vars in select were resetted to first on add/del row - CN
18 Sep 2003:	incompatibility: changed default of changerows to on; support for %-vars, Quiet save for saving without notification; all other fixes in Dev topic integrated - CN
08 Nov 2002:	Prevent variable expansion in label text; added escape characters
27 Jun 2002:	New helptopic parameter
26 Jun 2002:	Support for variables in included EDITTABLE parameters; fixed problem with HTML in cells
21 May 2002:	Added fixed label format; new changerows="add" parameter
27 Apr 2002:	Fixed bug where text after a double quote in a cell disappeared
18 Apr 2002:	Fixed bug where table was breaking when pasting multiple lines into an edit field using Netscape on Unix
08 Apr 2002:	Check for change permission and edit lock of topic
05 Apr 2002:	Initial version
Dependencies:	None
Perl Version:	5.008
Plugin Home:	<a href="http://foswiki.org/Extensions/EditTablePlugin">http://foswiki.org/Extensions/EditTablePlugin</a>
Support:	<a href="http://foswiki.org/Support/EditTablePlugin">http://foswiki.org/Support/EditTablePlugin</a>

- System

- Log In

- **Toolbox**

-  Users
-  Groups
-  Index
-  Search
-  Changes
-  Notifications
-  RSS Feed
-  Statistics
-  Preferences

- **User Reference**

- BeginnersStartHere
- TextFormattingRules
- Macros
- FormattedSearch
- QuerySearch
- DocumentGraphics
- SkinBrowser
- InstalledPlugins

- **Admin Maintenance**

- Reference Manual
- AdminToolsCategory
- InterWikis
- ManagingWebs
- SiteTools
- DefaultPreferences
- WebPreferences

- **Categories**

- Admin Documentation
- Admin Tools
- Developer Doc
- User Documentation
- User Tools

- **Webs**

- Public
- System

•

•



Copyright © by the contributing authors. All material on this site is the property of the contributing authors.

Ideas, requests, problems regarding Wiki? Send feedback